




FH680V 23.0HP

BYNORM PART NO 500-008



- Overhead v-valve
- 90° V-twin
- Pressurized lubrication
- Electronic spark ignition
- Automatic compression release
- Separate choke and throttle
- Dual element air cleaner
- Twin barrel, internally vented carburettor with fuel shut-off solenoid
- Rotating grass screen
- Cast-iron cylinder liners
- 1" x 80mm shaft

ENGINE TYPE	Forced Air-Cooled V-twin 4-cycle Vertical Shaft OHV Gasoline Engine	
Number of Cylinders	2	
Bore x Stroke	2.96 x 2.99 in. (75.2 x 76mm)	
Displacement	675cc (41.2 cu. in.)	
Compression Ratio	8.1:1	
Maximum Power	23.0hp (17.2 kW) / 3600 rpm	
Maximum Torque	39.8 ft. lbs. (54.0 N•m) / 2400 rpm	
Oil Capacity	2.0 U.S. qt. (1.9 liter) w/Filter	
Dry Weight (without muffler)	88.2 lbs. (40.0kg)	

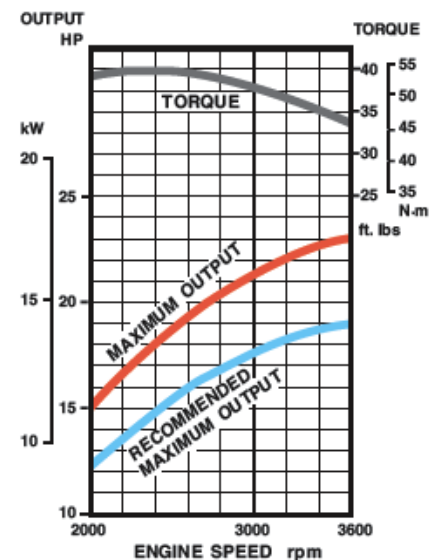

When ordering please use Bynorm part number